



Product Description

ISODAMP TD-1604 is a self-adhering, damping composite used for controlling structureborne vibration. An aluminum constraining layer combined with a proprietary damping material makes it a good choice for use in medium gauge structures.


- High system loss factor maintained following a thermal cycle treatment in heat oven
- Conformable to irregular shapes
- Available as die-cut, custom parts

TYPICAL PROPERTIES	ISODAMP TD-1604
Areal Weight , kg/m ²	2.52
Flammability FMVSS-302	Meets
Cold Flexibility	-30°C

The above technical information and data should be considered representative or typical only and should not be used for specification purposes.

TYPICAL PROPERTIES	ISODAMP TD-1604
Minimum Application Temperature , °C (°F)	5°C (41°F)
Odor ASTM D4339	No Odor
Fogging ASTM D5393, ISO 6452, SAE J1756	Pass
RoHS Compliant (as of Dec 2013)	Yes
REACH Compliant (as of Dec 2013)	Yes
TSCA Compliant (as of Dec 2013)	Yes

**High Temp
Heat Resistance**
One hour at 210°C



No curling, no blistering, no burning

<5% linear shrinkage

Maintains 99% of the original weight


PEEL STRENGTH

CONDITION*	180° Peel Strength ASTM D903 (aluminum substrate)	Sheer Strength ASTM D3163 (aluminum substrate)	90° Peel ASTM 6862 (Oily Cold Rolled Steel)
As produced (12 Hours RT)	6.8 lbf	24.8 lbf	5.5 lbf/in
After high temperature exposure*	3.6 lbf	17.39 lbf	
After thermal cycling**	8.3 lbf	29 lbf	4.0 lbf/in
2 weeks at 70°C			4.6 lbf/in
2 weeks at 38°C, 95% RH			4.3 lbf/in

* 1 hour at 210°C

** 3.1 Hour Cycles between -40°C and 70°C x 100

Precautionary Information: Refer to Box Label and Safety Data Sheet for safety information before handling this product.

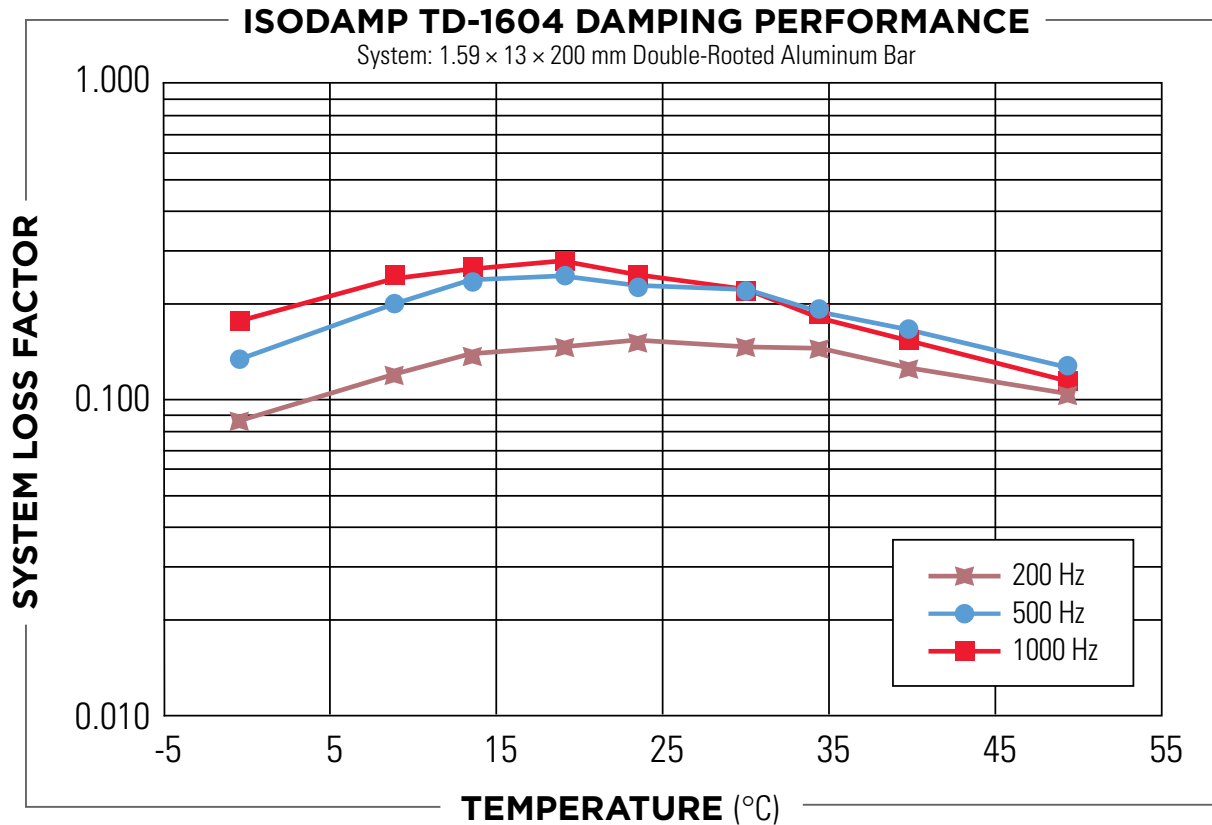

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that Aearo Technologies believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Many factors beyond Aearo Technologies’s control and uniquely within user’s knowledge and control can affect the use and performance of a Aearo Technologies product in a particular application. Given the variety of factors that can affect the use and performance of an Aearo Technologies product, user is solely responsible for evaluating the Aearo Technologies product and determining whether it is fit for a particular purpose and suitable for user’s method of application.

Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable Aearo Technologies product packaging or product literature, Aearo Technologies warrants that each Aearo Technologies product meets the applicable Aearo Technologies product specification at the time Aearo Technologies ships the product. Aearo Technologies MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the Aearo Technologies product does not conform to this warranty, then the sole and exclusive remedy is, at Aearo Technologies’s option, replacement of the Aearo Technologies product or refund of the purchase price.

Limitation of Liability

Except where prohibited by law, Aearo Technologies will not be liable for any loss or damage arising from the Aearo Technologies product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.