

Product Description

TUFshield TS-2471 thermal shield is a light-weight, highly conformable, resilient thermal solution. The flexible construction enables coverage for unique shapes and surfaces, while maintaining its thermal protection properties. Multiple adhesives packages are available to fit your application requirements.

- Thermal protection for interiors and machinery
- Ease of attachment via pressure sensitive adhesive
- Resilient to interior and exterior automotive conditions
- 5 mil robust adhesive package for the most challenging surfaces


TYPICAL PROPERTIES	TS-2471
Description	Aluminum / Foam / Adhesive
Surface Density, g/m² ASTM D3776	700
Thickness, mm	4.0
Flammability FMVSS 302	Pass
Thermal Conductivity, W/m - K 20°C	0.04
Reagent Resistance* <i>Results based on 4 hour immersion</i>	
Motor Oil	Pass
Antifreeze	Pass
Brake Fluid	Pass
Power Steering Fluid	Pass
Transmission Fluid	Pass
Washer Fluid	Pass

The above technical information and data should be considered representative or typical only and should not be used for specification purposes.


*Pass indicates no visual signs of degradation

High Temperature Test Rig

- Cylindrical heat source variable from 80°F (26.7°C) to 1300°F (704°C)
- Distance from heat source to sample material variable from 0.5" to 5.0"
- System measured at steady state
- Average temperature of heat source, hot side and cold side, are recorded

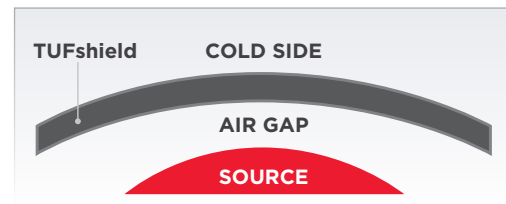

TUFshield TS-2471 thermal barrier is effective at reducing thermal loads in areas with high heat sources where little space is available.

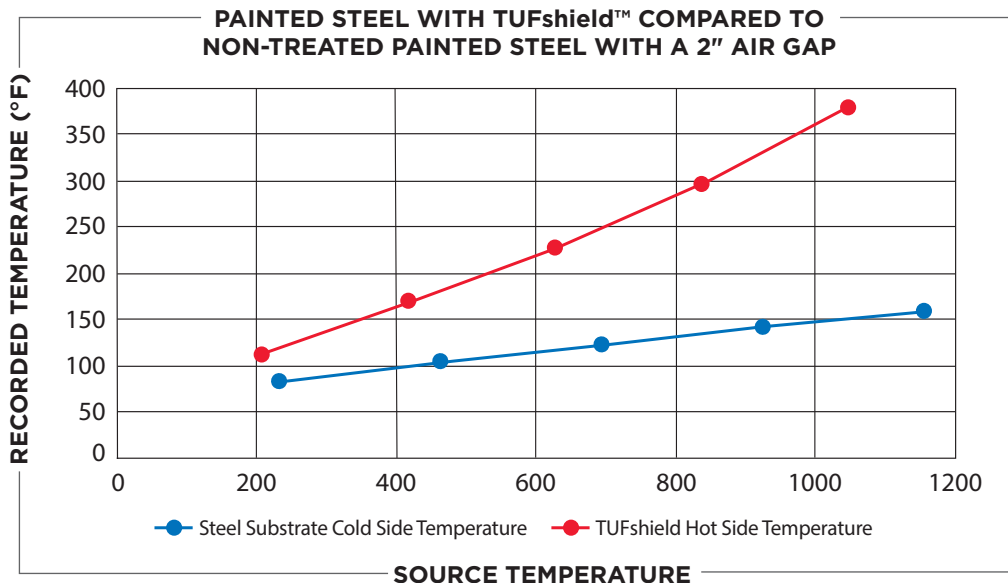

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that Aearo Technologies believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Many factors beyond Aearo Technologies's control and uniquely within user's knowledge and control can affect the use and performance of a Aearo Technologies product in a particular application. Given the variety of factors that can affect the use and performance of an Aearo Technologies product, user is solely responsible for evaluating the Aearo Technologies product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable Aearo Technologies product packaging or product literature, Aearo Technologies warrants that each Aearo Technologies product meets the applicable Aearo Technologies product specification at the time Aearo Technologies ships the product. Aearo Technologies MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the Aearo Technologies product does not conform to this warranty, then the sole and exclusive remedy is, at Aearo Technologies's option, replacement of the Aearo Technologies product or refund of the purchase price.

Limitation of Liability

Except where prohibited by law, Aearo Technologies will not be liable for any loss or damage arising from the Aearo Technologies product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.